



REV	ENR	DESCRIPTION	RELEASED BY	DATE
J		Added Flexible Connections	T. Raterman	4/10/08

Note 1. Minimum $\phi 1"$ Dia for lengths $< 10'$ from Processor to the vent risers
 Minimum $\phi 1-1/2"$ Dia. for lengths $> 10'$ from the Processor to the vent risers
 The three connections to the processor are $2" \phi$, NPT

Note 2. All three valves shown (connecting to the processor) must be locking ball valves.

A Flexible connections between the Processor locking ball valves and the vent(s) is allowable if required by the local authority having jurisdiction to meet seismic requirements. Should the flexible connections be installed that is not supported, the slope of the flexible connections back to the vent(s) shall be greater than $1/8"$ per foot.

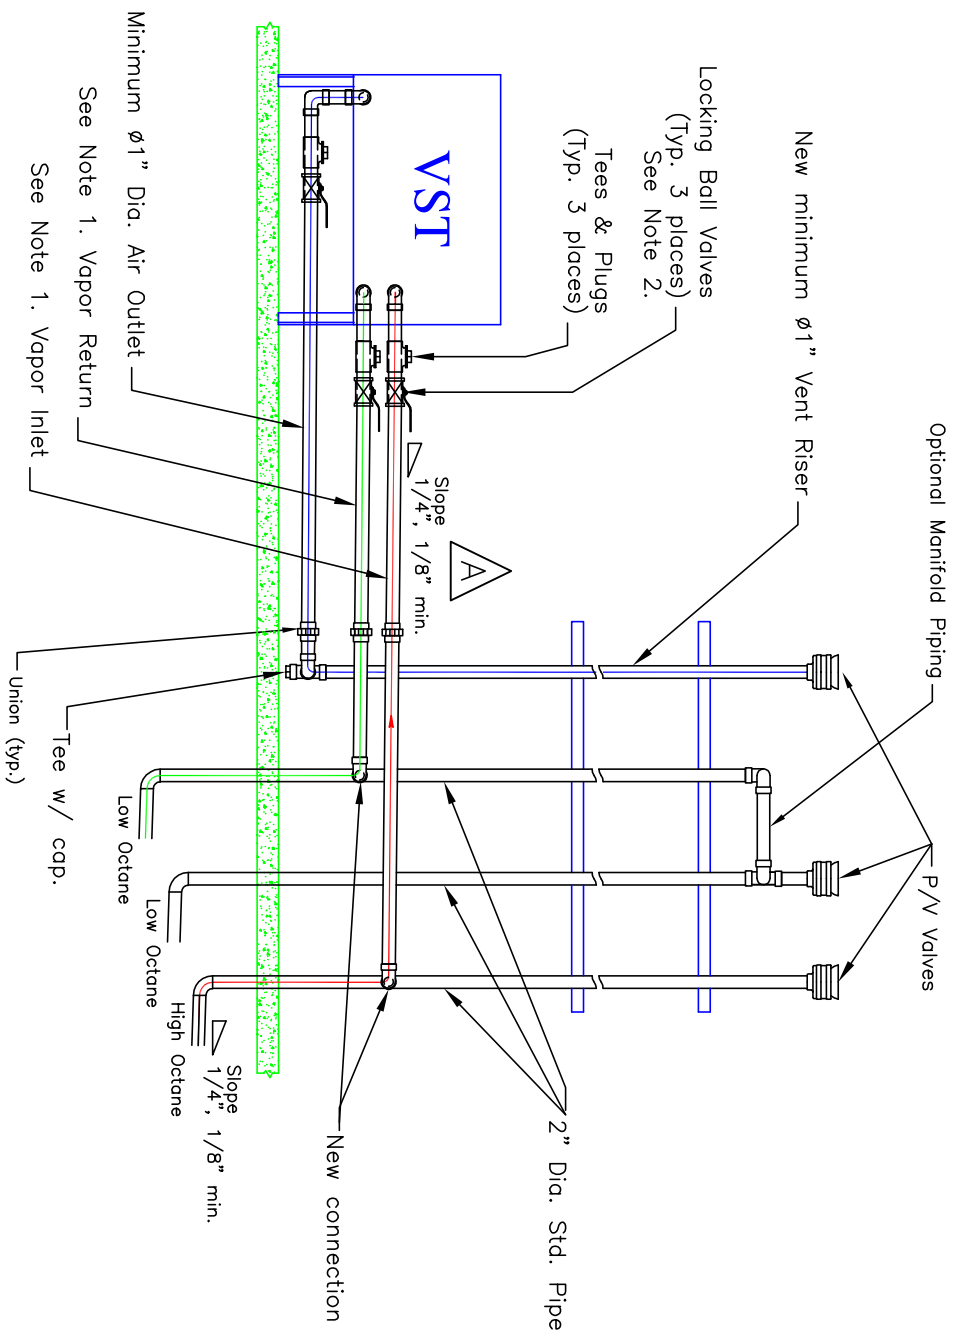

VST Vapor Systems Technologies, Inc.
 Springboro, Ohio 45066 www.vst hoses.com

VST Emissions Control system
 ECS Piping Connections

SCALE none
 SHEET 1 of 1

DWG NO. 5500-001

REV J