


REV	EON	DESCRIPTION	RELEASED BY	DATE
C		Added FLA Table	T. Raterman	12/18/07

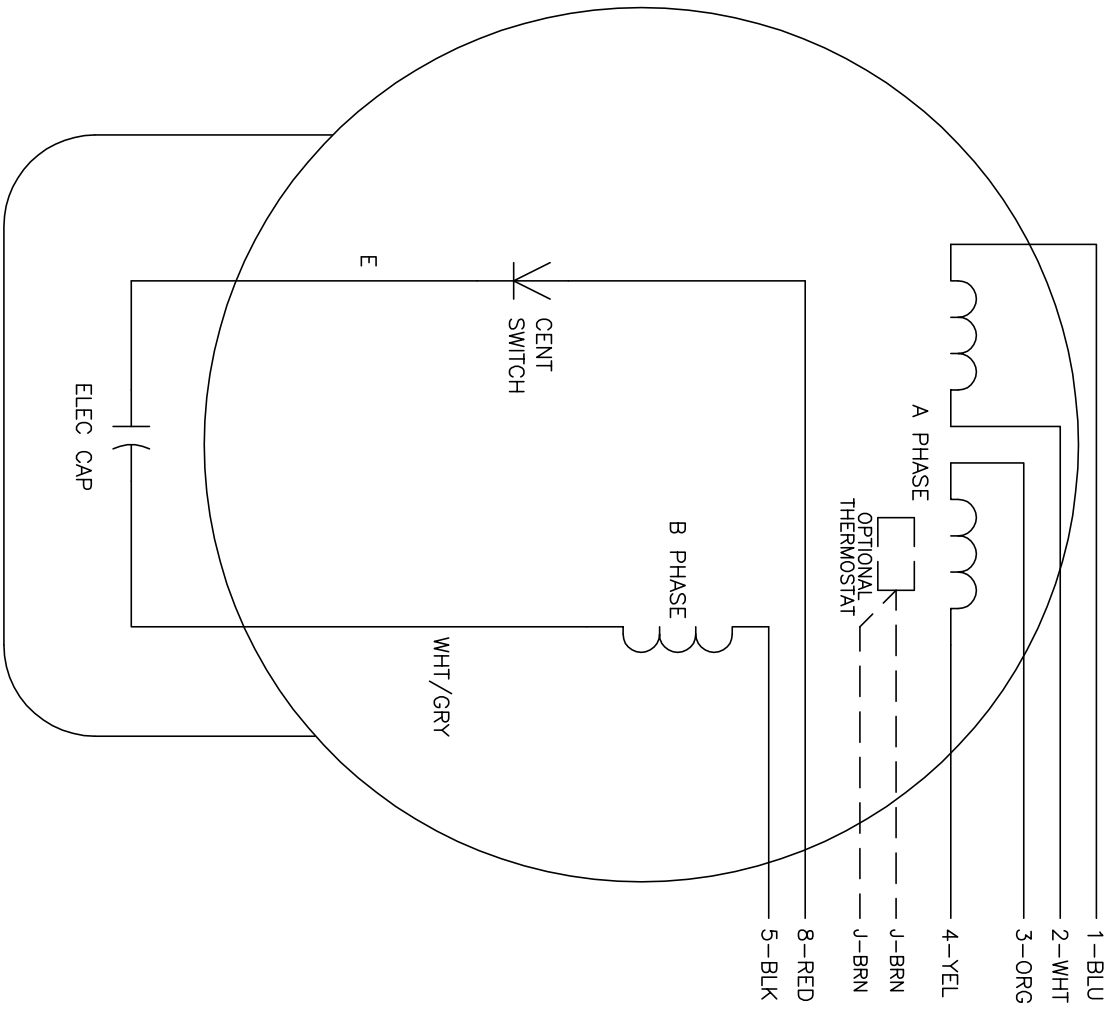


	L1	L2	JOIN	Voltage	
HIGH STD	1	4,5	2,3,8	230 V	Recommended
HIGH OPP	1	4,8	2,3,5		
LOW STD	1,3,8	2,4,5	-	115 V	Not Recommended
LOW OPP	1,3,5	2,4,8	-		

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
5. VST RECOMMENDS USING THE 230V DUE TO THE 115V HIGH POWER CONSUMPTION.

BALDOR MOTOR


Vapor Systems Technologies, Inc.
 Springboro, Ohio 45066 www.vsthose.com

Vacuum Pump Motor Data				
Voltage	FLA	HP	Phase	
115 V	24	2	Single	
230 V	12			

TITLE		ECS Membrane Processor	
SCALE		none	
SHEET		1 OF 1	
DWG NO.		5562-001	
REV		C	